

Catalog Number: Project Name: Note: Date: Type:


DESCRIPTION

Adopt integrated design, unique Aluminum heat dissipation structure, improve heat dissipation efficiency effectively prolong service life.


Built-in COB chip, good color display and high brightness.

With adjustable colors, 360° rotation, 20° tilt, and narrow beam angles of 15°, 24°, 38° to highlight architectural or artistic elements in your home.

Ideal for boLiving room, bedroom, kitchen, washroom, school, university, hospital, hotel, conference, meeting room, show room, showcase;



MODEL	WATTAGE	LUMEN
3EGCT24GWBST-D	24W	1600lm

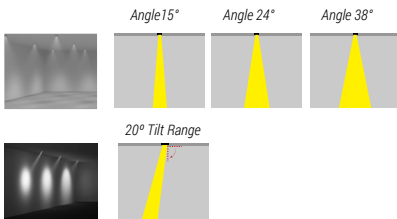

FEATURES

- Professional optical lens, uniform light
- Powder coated surface treatment is durable and not easy to fall off
- Excellent aluminum reflector offers even and better light color, bringing visual comfort
- Tilting gimbal light source for directional lighting

TECHNICAL SPECIFICATION

VOLTAGE	120V
POWER FREQUENCY	60Hz
POWER FACTOR	>0.9
CCT	2700K 3000K 3500K 4000K 5000K
CRI	90
BEAM ANGLE	15°/24°/38°
MATERIAL	AL+lens
LIFESPAN	≥50,000hours
OPERATING TEMP	(-4°F~ 113°F) -20~45°C
DIMMING	Triac Dimming
RATING	Suitable for Wet Locations
WARRANTY	5 year limited

INSTALLATION

No existing recessed housing or junction box required.
Suitable for most new constructions.
Install J-Box in ceiling beam, and insert light right into drywall opening.

DIMMING

Compatible with most triac dimmers to give user a smooth 100%-10% dimming to choose the desired brightness.
Please check the recommended dimmer list in next page.

ELECTRICAL

This fixture is built with the highest quality 120V drivers, ensuring energy efficiency.

ENERGY SAVINGS

80% more energy savings than halogen lamps.

LISTING

ETL Listed.




Catalog Number: Project Name: Note: Date: Type:


360° Rotation



20° Tilt Range

Narrow light angle optional: 15°, 24°, 38°

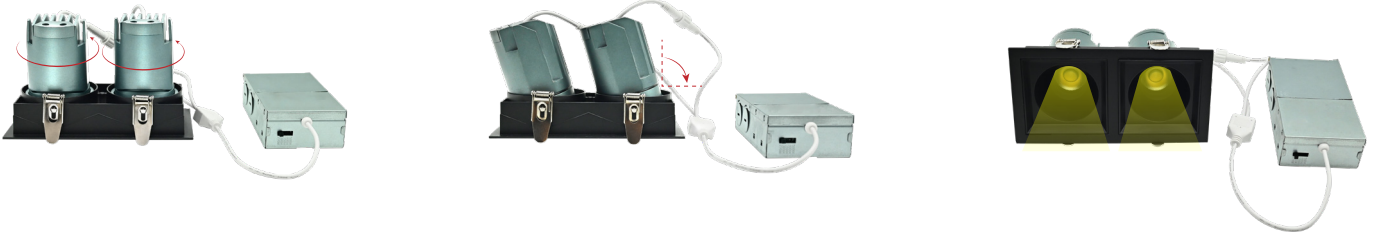

Finishing section trims are durable die cast aluminum with precision painted finish.

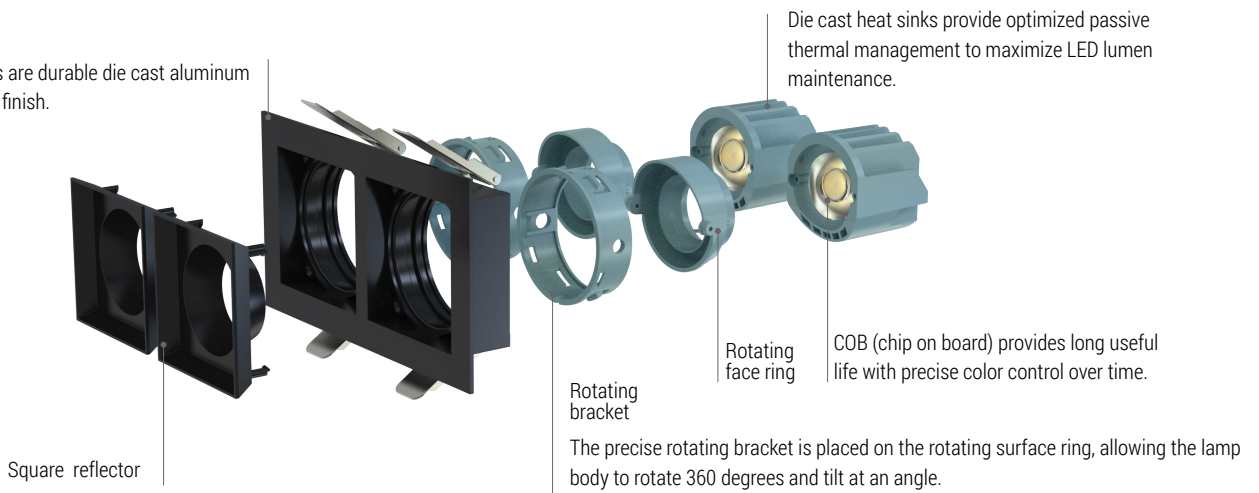

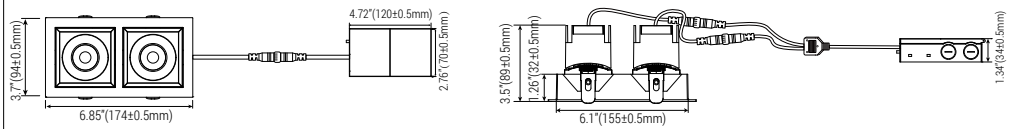Size	Dimension	Power	Hole Cutout
3inch		24W	

RECOMMENDED DIMMER

LUTRON				LEVITON
CTCL-153PDH-WH	DVCL-153P	CT-103PR-WH	DVRF-6L	RNL06 DSL06
TGCL-153PH-LA	MSCL-OP153M	MACL-153MA	CTCL-150H	
SLV-600P-AL	PD-6WCL	RCL-153RNL		