

Catalog Number : Project Name : Note : Date : Type :

DESCRIPTION

This fixture features an E26 socket for easy installation and is compatible with 5/6 inch recessed cans. Its height-adjustable design accommodates various retrofit housings.

Rated for installation in wet locations.

Features color tunable technology lets the user choose between 2700K, 3000K, 3500K, 4000K, or 5000K.

Ideal for bathrooms, cabinets, kitchens, entryways, bedrooms, living rooms, and hallways.



BASED ON SAMPLE SETTING. ACTUAL LUMENS MAY VARY.

MODEL#	SIZE	WATTAGE	CCT	LUMENS
RF12-06-12-UC5-D-WT	6inch	12W	2700K	721lm
			3000K	776lm
			3500K	811lm
			4000K	817lm
			5000K	787lm

FEATURES

- Can be converted to be used with pre-existing recessed housings.
- Includes integrated LED lighting.
- 90+ CRI, superior color rendering performance.

TECHNICAL SPECIFICATION

VOLTAGE	120V
POWER FREQUENCY	60Hz
POWER FACTOR	>0.9
5CCT	2700K 3000K 3500K 4000K 5000K
CRI	90
BEAM ANGLE	100°
MATERIAL	Iron+PC
COLOR	White
LIFESPAN	≥50,000hours
OPERATING TEMP	(-4°F~ 113°F) -20~45°C
DIMMABLE	Triac Dimming
RATING	Suitable for Damp Locations
WARRANTY	5 year limited

DIMMING

Triac dimmable down to 5%. Compatible with most major brands of dimmers.

ENERGY SAVINGS

80% more energy savings than halogen lamps.

INSTALLATION

Easy installation with universal E26 connectors. Fit 5" and 6" compatible housings.

LIFESPAN

This luminaire is built with the highest quality 120V drivers, ensuring energy efficiency. With a lifespan of 50,000 hours, it can last decades under normal operation!

LISTING

ETL Listed.

ETL CLASSIFIED



Catalog Number :	Project Name :	Note :	Date :	Type :
------------------	----------------	--------	--------	--------

Adjustable Neck Design	Selectable CCT
-------------------------------	-----------------------




INSTALLATION STEP

1. Extend the light fixture to its maximum height.
2. Attach the E26 socket to the mounting base, and push the adjuster upward until it is flush with the ceiling.
3. Secure the frame by tightening it until it is firmly fixed.
4. Installation is complete.



TRIM RING REPLACEMENT (SOLD SEPARATELY)

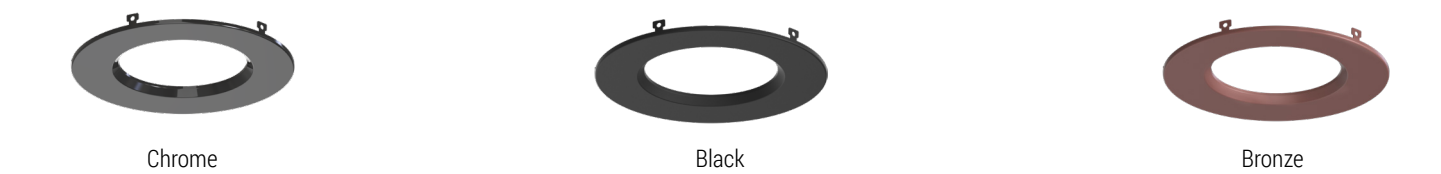

RECOMMENDED DIMMER

LUTRON					LEVITON	
CTCL-153P	GT-600P	PD-6WCL	MACL-153MA	DVRF-6L	6672	DSL06
TGCL-153PH-LA	DVCL-153P	S2-LFSQH-WH	DVWCL-153PH	CTCL-150H	6674	RNL06
SLV-600P-AL	MSCL-OP153M	CT-103PR-WH	RCL-153RNL			

DIMENSION

