

5CCT 3Wattage Square Retrofit Kit

Project Name :	Note:	Date:	Type:

DESCRIPTION

subway stations, etc

4"	6″	SELECTABLE 5CCT
		WATTAGE SELECTABLE

BASED ON SAMPLE SETTING.ACTUAL LUMENS MAY VARY.				
MODEL#	SIZE	WATTAGE	5CCT	LUMENS
6HVCTLS05WH-HV	4inch	6-9-12W	2700K 3000K 3500K 4000K 5000K	400-600-820lm
MODEL#	SIZE	WATTAGE	5CCT	LUMENS
6HVCTLS05WH-HV	6inch	10-14-18W	2700K 3000K 3500K 4000K 5000K	650-950-1260lm

TECHNICAL SPECIFICATION

VOLTAGE	120-277V
POWER FREQUENCY	60Hz
POWER FACTOR	>0.9
5CCT	2700K 3000K 3500K 4000K 5000K
CRI	90
BEAM ANGLE	100°
MATERIAL	AL+PS
COLOR	White
LIFESPAN	≥50,000hours
OPERATING TEMP	(-4°F~ 113°F) -20~45°C
DIMMABLE	0-10V
RATING	Suitable for Damp Locations
WARRANTY	5 year limited



FEATURES

- · Perfect for retrofit jobs
- No tools required for installation
- · Emits evenly, without halo or shadows
- Built-in Driver

INSTALLATION

Fit in 4, 6 inch compatible housing cans directly, no additional accessories are required.

DIMMING

Supports 0-10V dimming from 100% to 0%. Please check the recommended dimmer list in next page.

ELECTRICAL

This fixture is built with the highest quality 120-277V drivers, ensuring energy efficiency.

ENERGY SAVINGS

80% more energy savings than halogen lamps.


LISTING

ETL Listed.Energy Star.Title24.


www.koklighting.com				trofit Kit Series ge Square Retrofit Kit
Catalog Number:	Project Name :	Note:	Date:	Type:

Selectable Cct & Selectable Wattage

Rotatable Mounting Bracket

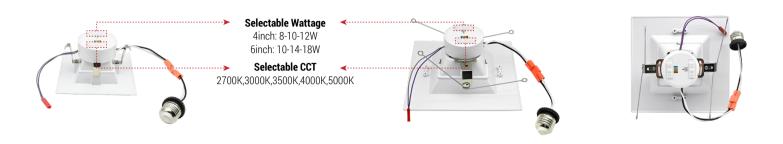

SIZE & DIMENSION & HOUSING CANS

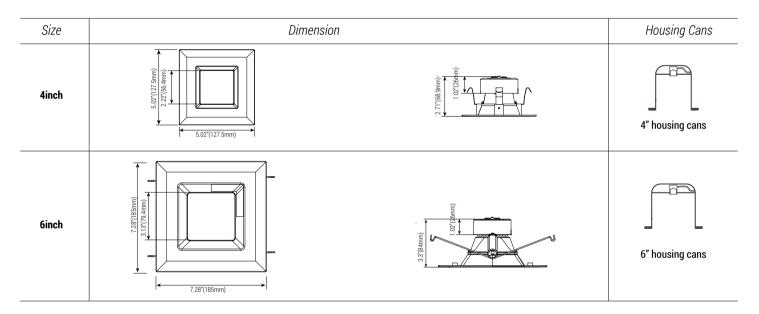

RECOMMENDED DIMMER

LUT	RON	LEGRAND
RMJS-8T-DV-B Diva DVSTV	MS-Z101-WH DVSTV-WH	RH4FBL3PW

ACCESSORIES



E26 Adapter