


Catalog Number: _____ Project Name: _____ Note: _____ Date: _____ Type: _____

DESCRIPTION

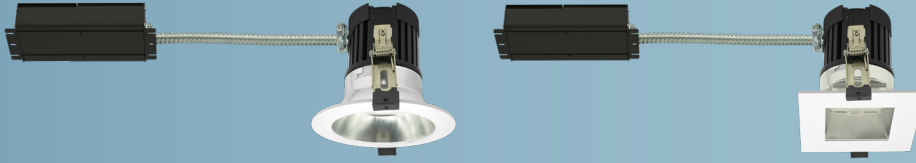

- The innovative separable design of junction box and trim makes it more flexible. one engine allows for seamless integration of multiple trim options, easy and tool-free installation.
- 2 installation ways supporting: Recessed and Retrofit.
- It is suitable for commercial and public places and elegantly decorates the ambience, such as shopping mall, hospital, airport, hotel lobby etc.

FEATURES

- Spun aluminum reflector integrate with haze finish and white trim ring with shadow free.
- 0-10V dimmable.
- Available in 3 wattages and 5 CCT tunable.
- Trim types: round, square.

Cover surface color is optional



TECHNICAL SPECIFICATION

VOLTAGE	120-277V
POWER FREQUENCY	50/60Hz
POWER FACTOR	>0.9
5CCT	2700K 3000K 3500K 4000K 5000K
CRI	90
BEAM ANGLE	35°
MATERIAL	AL+PC
COLOR	Black+White
LIFESPAN	≥50,000hours
OPERATING TEMP	(-4°F~ 113°F) -20~45°C
DIMMABLE	0-10V dimmable
RATING	Suitable for Wet Locations
WARRANTY	5 year limited



INSTALLATION

Easy assembly, tool-free installation.

ELECTRICAL

This fixture is built with the highest quality drivers, ensuring energy efficiency.

ENERGY SAVINGS

80% more energy savings than halogen lamps.

LISTING


ETL Listed.




MODEL	TRIM	WATTAGE	LUMEN
SPCM22MD05	DT-4R-M	12W-17W-22W	1200lm/1700lm/2200lm
	DT-6R-M		1100lm/1600lm/2100lm
	DT-4S-M		1200lm/1700lm/2200lm
	DT-6S-M		1100lm/1600lm/2100lm



MODEL	TRIM	WATTAGE	LUMEN
SPCM32MD05	DT-4R-M	17W-24W-32W	1700lm/2400lm/3200lm
	DT-6R-M		1600lm/2300lm/3100lm
	DT-4S-M		1700lm/2400lm/3200lm
	DT-6S-M		1600lm/2300lm/3100lm



MODEL	TRIM	WATTAGE	LUMEN
SPCM22MD05	DT-4R-M	12W-17W-22W	1200lm/1700lm/2200lm
	DT-4S-M		1100lm/1600lm/2100lm



MODEL	TRIM	WATTAGE	LUMEN
SPCM32MD05	DT-6R-M	17W-24W-32W	1700lm/2400lm/3200lm
	DT-6S-M		1600lm/2300lm/3100lm

Catalog Number: Project Name: Note: Date: Type:


The innovative separable design of junction box and trim makes it more flexible.



The adjustable spring or clip can be easily installed.





















Selectable CCT & Selectable Wattage

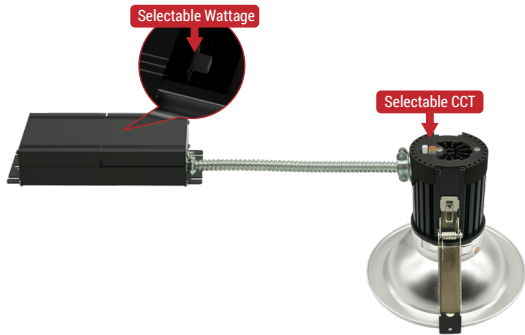

One engine allows for seamless integration of multiple trim options, easy and tool-free installation.



Size	Install	Dimension				Hole Cutout & Housing Cans
4inch	Recessed					 Hole Size Ø4 21/64" (110mm)
	Retrofit					
6inch	Recessed					 Hole Size Ø6 19/64" (160mm)
	Retrofit					

RECOMMENDED DIMMER

LUTRON				LEGRAND	
RMJS-8T-DV-B	Diva DVSTV	MS-Z101-WH	DVSTV-WH	RH4FBL3PW	