

Catalog Number :	Project Name :	Note :	Date :	Type :
------------------	----------------	--------	--------	--------

## DESCRIPTION

This flush mount panel light is designed for comfortable illumination in office, home, hotels, corridors, shopping malls, schools.

Features color tunable technology lets the user choose between 2700K, 3000K, 3500K, 4000K, or 5000K.

Available size: 5", 7", 9"



### BASED ON SAMPLE SETTING. ACTUAL LUMENS MAY VARY.

MODEL#	SIZE	WATTAGE	5CCT	LUMENS
5FMCT10SRWH	5inch	10W	2700K	525lm
			3000K	551lm
			3500K	596lm
			4000K	650lm
			5000K	578lm

MODEL#	SIZE	WATTAGE	5CCT	LUMENS
7FMCT15SRWH	7inch	15W	2700K	980lm
			3000K	1044lm
			3500K	1090lm
			4000K	1127lm
			5000K	1072lm

MODEL#	SIZE	WATTAGE	5CCT	LUMENS
9FMCT18SRWH	9inch	18W	2700K	1042lm
			3000K	1129lm
			3500K	1214lm
			4000K	1240lm
			5000K	1179lm

## TECHNICAL SPECIFICATION

VOLTAGE	<b>120V</b>
POWER FREQUENCY	<b>60Hz</b>
POWER FACTOR	<b>&gt;0.9</b>
5CCT	<b>2700K   3000K   3500K   4000K   5000K</b>
CRI	<b>90</b>
BEAM ANGLE	<b>120°</b>
MATERIAL	<b>AL+Plastic+PS</b>
COLOR	<b>White</b>
LIFESPAN	<b>≥50,000hours</b>
OPERATING TEMP	<b>(-4°F~ 113°F) -20~45°C</b>
DIMMING	<b>Triac Dimming</b>
RATING	<b>Suitable for Wet Locations</b>
WARRANTY	<b>5 year limited</b>

## FEATURES

- Emits evenly, without halo and shadow
- Fit 4" J-Box and 5"/6" Housing
- 2 installation ways supporting: Surface mount and Retrofit
- Color removable trim available (sold separately): Brushed Nickel, Black, Bronze

## STYLISH AND SLIM DESIGN

This ultra bright LED Flush Mount is only 0.5 inch thickness. The smooth surface is suitable for a variety of decorative styles.

## DIMMING

Compatible with most triac dimmers to give user a smooth 100%-10% dimming to choose the desired brightness. Please check the recommended dimmer list in next page.

## ELECTRICAL

This fixture is built with the highest quality 120V drivers, ensuring energy efficiency.

## ENERGY SAVINGS

80% more energy savings than halogen lamps.

## LISTING

ETL Listed.




Catalog Number:      Project Name:      Note:      Date:      Type:







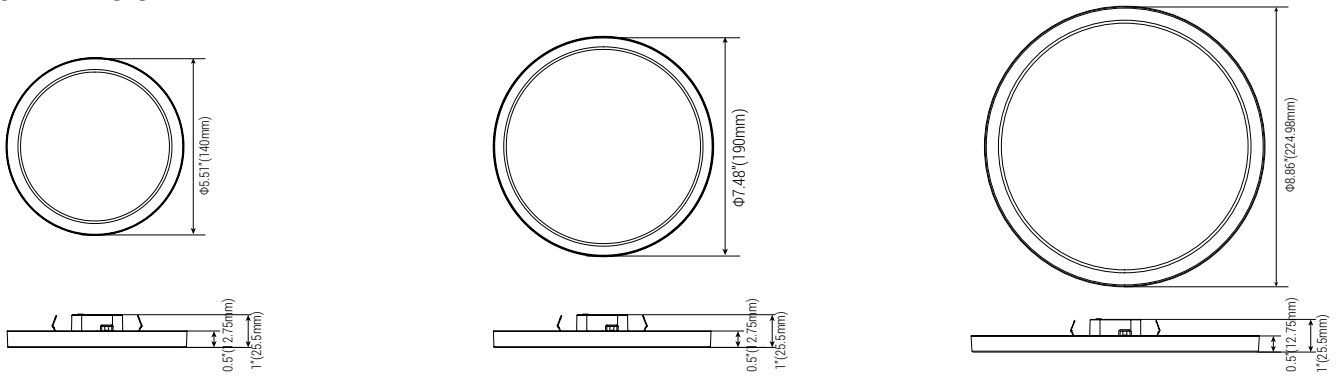

### COLOR TEMPERATURE OPTIONAL



### SIZE & DIMENSION



### ACCESSORIES

Surface Mount Accessories			Retrofit Installation Accessories				
Mounting Bracket	Wire Nuts	Screws 1	Mounting Bracket	Springs	E26 Adapter	Wire Nuts	Screws 2
							

### RECOMMENDED DIMMER

LUTRON				LEVITON	
TG-600PR-WH	TGCL-153PH-LA	SCL-153PH-WH	MSCL-OP153M	6672	
S-600PR-WH	SLV-600P-AL	GT-600P	MACL-153M//MA-R	6674	RNL06
CTCL-153PDH-WH	DV-600PR-WH	DVCL-153P	PD-6WCL	DSL06	IPL06

### REMOVABLE TRIM(SOLD SEPARATELY)



Brushed Nickel



Black



Bronze