

Commercial Grade E Series

LED Split Deep Regress Mini Commercial Downlight

Date: Catalog Number: Project Name: Note: Type:



FEATURES

- Spun aluminum reflector integrate with haze finish and white trim ring with shadow free.
- 0-10V dimmable.
- · Available in 3 wattages and 5 CCT tunable.
- Trim types: round, square.

INSTALLATION

Easy assembly, tool-free installation.

ELECTRICAL

This fixture is built with the highest quality drivers, ensuring energy efficiency.

ENERGY SAVINGS

80% more energy savings than halogen lamps.

LISTING

ETL Listed.



TECHNICAL SPECIFICATION


VOLTAGE	120-277V
POWER FREQUENCY	50/60Hz
POWER FACTOR	>0.9
5CCT	2700K 3000K 3500K 4000K 5000K
CRI	90
BEAM ANGLE	85° 65°
MATERIAL	AL+PC
COLOR	Balck+(Silver+White)
LIFESPAN	≥50,000hours
OPERATING TEMP	(-4°F~ 113°F) -20~45°C
DIMMABLE	0-10V dimmable
RATING	Suitable for Wet Locations
WARRANTY	5 year limited









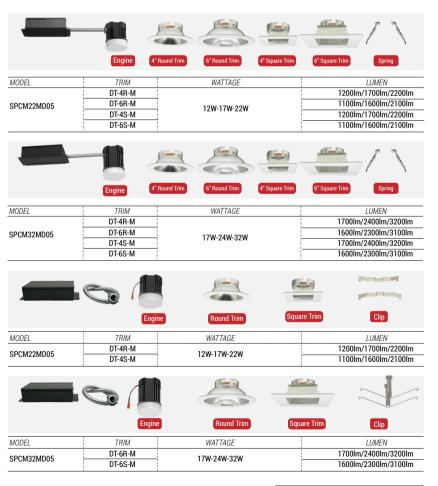



Commercial Grade E Series

LED Split Deep Regress Mini Commercial Downlight

Catalog Number: Project Name: Note: Date: Type:

The innovative separable design of junction box and trim makes it more flexible.



Selectable CCT & Selectable Wattage



The adjustable spring or clip can be easily installed.





One engine allows for seamless integration of multiple trim options, easy and tool-free installation.





Size	Install	Dimension				
4inch	Recessed	6977 (866 jam) 17 (17 (1866 jam) 17 (17 (1866 jam) 17 (18 (18 (18 (18 (18 (18 (18 (18 (18 (18	1.57770000000000000000000000000000000000	4.70(121+6.5mm)	6.97(77.545.5mm) (4.50) (5.77(1643.5mm) (5.77(1643.5mm) (6.50) (6.50) (6.50) (6.50) (6.50) (6.50) (6.50) (6.50) (6.50) (6.50) (6.50) (6.50) (6.50) (6.50) (6.50) (6.50) (6.50) (6.50) (6.50) (6.50) (6.50) (6.50) (6.50) (6.50) (6.50) (6.50) (6.50) (6.50) (6.50) (6.50) (6.50) (6.50) (6.50) (6.50) (6.50) (6.50) (6.50) (6.50) (6.50) (6.50) (6.50) (6.50) (6.50) (6.50) (6.50) (6.50) (6.50) (6.50) (6.50) (6.50) (6.50) (6.50) (6.50) (6.50) (6.50) (6.50) (6.50) (6.50) (6.50) (6.50) (6.50) (6.50) (6.50) (6.50) (6.50) (6.50) (6.50) (6.50) (6.50) (6.50) (6.50) (6.50) (6.50) (6.50) (6.50) (6.50) (6.50) (6.50) (6.50) (6.50) (6.50) (6.50) (6.50) (6.50) (6.50) (6.50) (6.50) (6.50) (6.50) (6.50) (6.50) (6.50) (6.50) (6.50) (6.50) (6.50) (6.50) (6.50) (6.50) (6.50) (6.50) (6.50) (6.50) (6.50) (6.50) (6.50) (6.50) (6.50) (6.50) (6.50) (6.50) (6.50) (6.50) (6.50) (6.50) (6.50) (6.50) (6.50) (6.50) (6.50) (6.50) (6.50) (6.50) (6.50) (6.50) (6.50) (6.50) (6.50) (6.50) (6.50) (6.50) (6.50) (6.50) (6.50) (6.50) (6.50) (6.50) (6.50) (6.50) (6.50) (6.50) (6.50) (6.50) (6.50) (6.50) (6.50) (6.50) (6.50) (6.50) (6.50) (6.50) (6.50) (6.50) (6.50) (6.50) (6.50) (6.50) (6.50) (6.50) (6.50) (6.50) (6.50) (6.50) (6.50) (6.50) (6.50) (6.50) (6.50) (6.50) (6.50) (6.50) (6.50) (6.50) (6.50) (6.50) (6.50) (6.50) (6.50) (6.50) (6.50) (6.50) (6.50) (6.50) (6.50) (6.50) (6.50) (6.50) (6.50) (6.50) (6.50) (6.50) (6.50) (6.50) (6.50) (6.50) (6.50) (6.50) (6.50) (6.50) (6.50) (6.50) (6.50) (6.50) (6.50) (6.50) (6.50) (6.50) (6.50	Hole Cutout & Housing Cans Hole Size 4 21/64'(110mm)
	Retrofit	In the second se	- Interest to the state of the	200/1500mi	TO THE PART OF THE	4" housing cans
	Recessed	To the spice of th	1 (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970) (1970)	4.70(7.21 to 5 form)	6.59*(177.5±0.5mm) (Supplemental Supplemental Supplement	Hole Size
6inch		100/V21 (100/20.00.00.2)	100 STATES 100 S	S SYLEGO Gran	\$ 6001020.0 mm/s	Φ6 19/64* (160mm)
	Retrofit	(e) (2.007/20m)	2.00/66.3 mm)	6.50Y(7.75 5mm)	STATE Stems	6" housing cans

RECOMMENDED DIMMER

LUTRON				LEGRAND
RMJS-8T-DV-B	Diva DVSTV	MS-Z101-WH	DVSTV-WH	RH4FBL3PW